


# GU2RW-S GU2GW-S

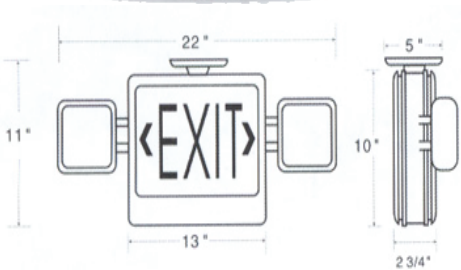

## Product Details

Model:

GU2GW-S / GU2RW-S

## Description:

Combines an LED exit light and emergency lighting unit with 360 rotating heads plus easy connect feature, all in a compact, modern design.

## Features At-A-Glance:

- Housing: injection-molded, V-O flame retardant, high-impact, thermoplastic housing. Compact, low profile design in a white or black housing.
- Option: Remote capable unit available (option REM). REM option allows for operation of up to two additional 5.4 watt lighting heads.

Listings & Certifications:



## Information:

- \* UL & ETI listed.
- \* Battery: 6-volt, sealed lead acid, maintenance-free, rechargeable
- \* Charging Circuitry: Internal solid-state transfer switch automatically connects the internal battery to the two lamp heads, illuminating them for a minimum of 90-minute emergency operation
- \* Electrical: Universal transformer for 120 or 277V AC operation.

## Comforts & Advantages

**Illumination:** Energy efficient red or green LED. LED lamp life of 25 years plus. Energy consumption less than 4 watts for red letters and less than 2 watts for green letters. Two fully adjustable 5.4 watt, glare-free lighting heads. High performance smooth thermoplastic reflector and polycarbonate lens for optimal light distribution and resistance to discoloration from natural or artificial light sources. Snap in directional arrows.

**Mounting:** Universal mounting canopy for side or top installation.

## Ordering Information -

Series	Canopy	Number of Faces	Letter Color	Housing Color	UL & ETI Listed
GU2GW	U = Universal Mounting	1 = Single Face	R = Red	W = White	YES
GU2RW	Canopy included.		G = Green	B = Black	